


# FLRYWdBYWd (FLRYBY-125)

多芯屏蔽缆

-40°C ~ +125°C / 3000h

Screened multi-core sheathed cables

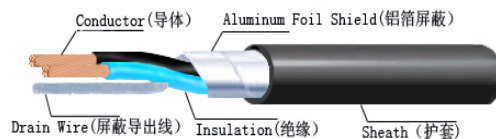

**产品特点:**

芯线类型: FLRYWd (FLRY-125)

**屏蔽材料:**

铝塑复合带 + 导出线芯

**护套材料:**

聚氯乙烯

**执行标准:**

ISO 6722, ISO14572 CLASS C

**包装方式:** 成盘, 成圈。

**FEATURE:**

Core type: FLRYWd (FLRY-125)

**Shield:**

AL/PET Tape + Drain wire

**SHEATH:**

PVC

**STANDARD:**

ISO 6722, ISO14572 CLASS C

FORM OF DELIVERY: On reels, drums.

导体/Conductor			绝缘/Insulation		电线/Cable	
标称截面 Nominal Cross-section mm <sup>2</sup>	结构 Number of wires/ Max. dia. of strand Pcs/mm	最大电阻 Max Resistance (20°C) mΩ/m	最大外径 Outside diameter Max. mm	标称厚度 Insulation thickness Nom.. mm	外径 Outside diameter Max. mm	标称厚度 Insulation thickness Nom.. mm
1×0.5+(0.5)	19/0.19	37.1	1.6	0.28	4.40	0.50
2×0.5+(0.5)	19/0.19	37.1	1.6	0.28	4.50	0.50
3×0.5+(0.5)	19/0.19	37.1	1.6	0.28	5.80	0.80
4×0.5+(0.5)	19/0.19	37.1	1.6	0.28	6.00	0.60
1×0.75+(0.5)	19/0.24	24.7	1.9	0.30	5.00	0.50
2×0.75+(0.5)	19/0.24	24.7	1.9	0.30	5.50	0.50
3×1.0+(0.5)	32/0.21	18.5	2.1	0.30	6.20	0.60



北京斯普乐电线电缆有限公司  
Beijing S.P.L Wire & Cable Co.,Ltd

Tel: 86-10-61665369  
Fax: 86-10-61667272  
Web: www.spl-cable.com